# 1X-F4-SC-28

## Conventional Fire Panel with Scandinavian Key - 4 Zone



# 1X-F4-SC-28

## Conventional Fire Panel with Scandinavian Key - 4 Zone

## Technische Spezifikationen

### General

| | |
|---|---|
| Maximum system capacity (device count) | bis zu 1280 |
| Network size (nodes) | bis zu 16 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 4 |

### Zone

| | |
|---|---|
| Maximum zone capacity | bis zu 4 |

### Input

| | |
|---|---|
| Input quantity | 2 |

### Physical


| | |
|---|---|
| Form factor | Lille |
| Colour | Grå (RAL 7035) |
| Mounting type | Overflademontering |

### Environmental

| | |
|---|---|
| Environment | Indendør |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-4 |

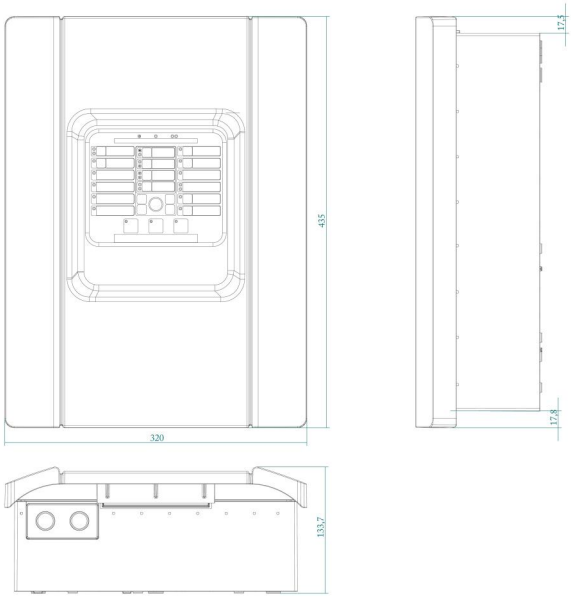


KIDDE COMMERCIAL

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.