1X-F2-SC-28

Conventional Fire Panel with Scandinavian Key - 2 Zone



1X-F2-SC-28

Conventional Fire Panel with Scandinavian Key - 2 Zone

Specifiche tecniche

General

Maximum system capacity (device count)	jusqu'à 1280
Network size (nodes)	jusqu'à 32

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	jusqu'à 2

Input

Input quantity	2

Physical


Form factor	Lille
Colour	Grå (RAL 7035)
Mounting type	Overflademontering

Environmental

Environment	Indendør

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-4

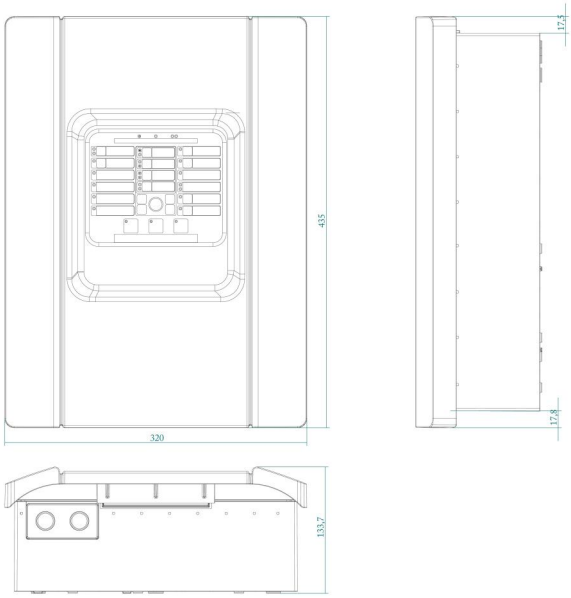

KIDDE COMMERCIAL

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57