
ZE2064

1200/2000 Series - 64 Zone LED Extension Card With Fire And Fault LEDs Per Zone

General

The ZE2064 allows the extension of the visible zone indications of the FP28255 and FR20255 fire panels and repeaters by 64 additional zones.

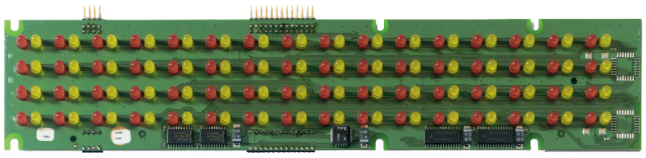

Details

- Extends the visual zone LED display by 64
- Provides fire and fault LEDs for every zone
- No configuration required
- Supplied with nuts and washers for easy installation

ZE2064

1200/2000 Series - 64 Zone LED Extension Card With Fire And Fault LEDs Per Zone

Technical specifications

Physical

Form factor	Medium
Dimensions	314 x 64 mm
Weight	120 g

Regulatory

Certification	EN54-2

Electrical

Current consumption	14 mA

Environmental

Storage temperature	-10°C to +70°C
Operating temperature	-10°C to +50°C
Relative humidity	10% to 95%

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 1 September 2025 - 11:04