ASC366

Conventional Ceiling Mount VAD, Multi Tone, Shallow Base - Red Flash



ASC366

Conventional Ceiling Mount VAD, Multi Tone, Shallow Base - Red Flash

Spécifications techniques

Electrical

Current consumption	Sounder: 5.1 mA, Beacon: 20 mA @ 0.5 Hz / 40 mA @ 1 Hz

Physical

Net weight	215 g
Colour	Red
Mounting type	Base mount
Mounting position	Ceiling
Mounting base	Shallow
Material	High impact polycarbonate

Environmental

Operating temperature	-25 to +70°C
Relative humidity	5 to 95%
Environment	Indoor
IP rating	IP21


Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	EN54-23, EN54-3

Produits compatibles

Catégorie	Référence	Description
Notification device	ASC366W	Conventional Ceiling Mount VAD, Multi Tone, Shallow Base - Red Flash
Notification device	ASC367	Conventional Ceiling Mount VAD, Multi Tone, Deep Base - Red Flash

EN54-23 Coverage: C–3-8.9

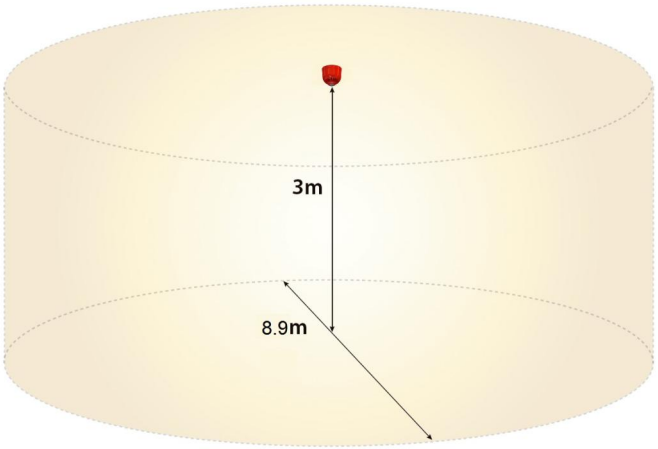

KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57