
EVN4700-MBC

Always On. Always Aware.
PCB de remplacement pour la centrale Everon 4700

Product overview

Replacement PCB for Everon 4700 panel (ATS4700)

ATS4700-MBC is delivered only with PCB and with associated plastic cover.
For upgrading from ATx500, also order ATx700-RETRO fit kit which contains PSU, Brackets and cables etc. needed for upgrading.

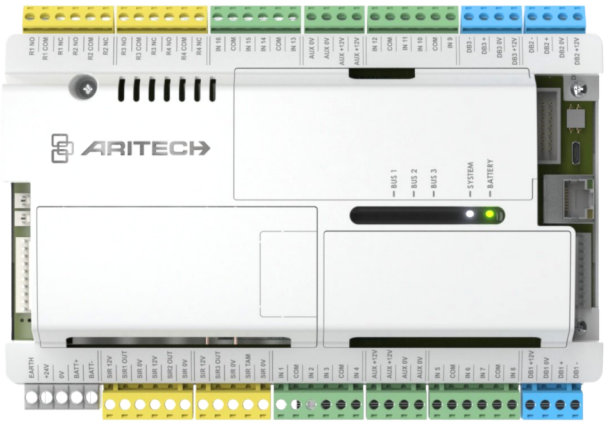

Détails

- Carte PCB de remplacement pour la centrale Everon 4700
- Centrale Everon 4700, connectivité IP embarquée, conformité EN Grade 3, interface WebApp, 16 zones intégrées (jusqu'à 1 000 zones), 64 secteurs.

EVN4700-MBC

Always On. Always Aware.
PCB de remplacement pour la centrale Everon 4700

Spécifications techniques

System

Product line	Everon
Product type	Integrierte Zugangskontrolle
Panel type	Hybrid
Kit	No
No. of keypads / readers	32
Data Gathering Panels (DGP)	30
No. of alarm groups	256
Specified cable	WCAT52 or equivalent

Inputs

Max no. of inputs	1000
Onboard inputs	16
Inputs plug-in expansion	8
ATS1202 support	3

Outputs

No. of outputs	128
No. of onboard outputs	3 electronic outputs + 4 relays

Area

No. of areas	16

User/Cards

Max. no. of users	Up to 65532
Users with name	1000
Max. no. of cards	2000 to 65532
Max. no. of PIN codes	2000 to 65532

Access control

Standard doors on control panel	16
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	48

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, IP
Databus type	RS485

Event log

Alarm event log	14500
Access event log	20000

Electrical

Operating voltage	24 VDC
Current consumption	800 mA max at 230VAC
Mainboard current consumption	110 mA at 24 V (PSU), 160 mA at 12 V (battery)
Max system current	950 mA at 13.8 V ±0.2 V
Max aux power current	3500 mA at 13.8 VDC ±0.4 V
Auto-reset fuses	3 (electrical, 1.3A per use)
Glass break fuses	1 (mains power, T-2A 230 VAC, slow)

Physical

Physical dimensions	199 x 140 x 45 mm
Net weight	405 g

Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing
Environmental Class	Class II, indoor
IP rating	IP31

Regulatory

Compliancy	CE

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57