SMA-LP-MULTI

MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE



SMA-LP-MULTI

MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE

Technische specificaties

System

RTE (Request To Exit)	No
CSN (Card Serial Number)	Yes
Custom data model	Yes

Technology

Reader type	BioMetric
Reader operating-transmitting frequency	13.56 MHz
Supported technology 13.56 MHz	MIFARE Classic (CSN), MIFARE Classic (custom data), MIFARE DESFire (CSN), MIFARE DESFire EV1 (CSN), MIFARE DESFire EV1 (custom data), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE Plus (CSN, level 1 and 3), NFC (CSN)
SAM module embedded	No

Biometric

Biometric type	Fingerprint
Biometric sensor type	Optical

Interface & connections

Interface	Ethernet, OSDP V2, OSDP V2 Secure Channel, RS-485, USB, Wiegand
Connector type	Network, Pigtail

Tamper type

Pry-off tamper	No
Opening tamper	Yes

Operation

Stand-alone	Yes
PIN keypad	Yes

Electrical

Power supply type	PoE in

Physical


Colour	Black
Material	Polycarbonate
Form factor	Oversized
Mounting type	Surface mount

Environmental

Vandal proof	No
Environment	Outdoor

Regulatory

Compliancy	CE, FCC, ICASA, REACH, RoHS, UL 294, WEEE

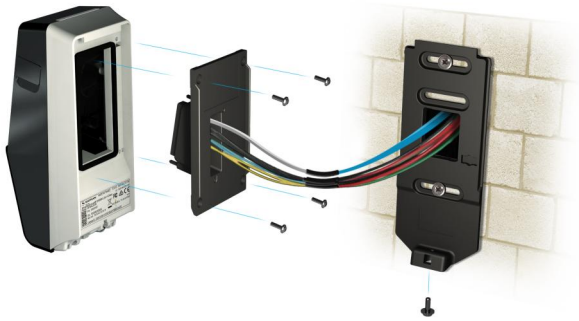

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57