# NC-MC-0-G

## Inteligentny konwencjonalny ręczny przycisk ostrzegawczy do montażu wnękowego - 0 Ω (zielony)

### General

The NC-MC-0-G is a green manual call point for recess mount applications on most industry standard, high quality wall boxes. For surface mount applications an optional, colour matched back box is available.

The call point offers one normally open contact in series with a 0 Ω resitor, as well as a single pole, changeover contact with common, normally open and normally closed connections. It is supplied with a EN54 style resettable element, pluggable connectors for both contacts, a handy wire bridge to help with cable continuity testing, as well as a test key that doubles up as a service tool for disassembly of the device.

### Installation

Installation time and installation flexibility are of paramount importance. The KGS MCP range directly meets these needs by providing features designed specifically for this. Pluggable terminal blocks facilitate the pre-connection of all cables. This terminal block is then simply connected to the MCP. Should continuity testing be needed, the handy wire bridge fits neatly into the terminal block in place of the MCP without having to disconnect any cables.

For service and maintenance no additional tools other than the test key is needed. With easy front access in all installations and even with the protection cover fitted, the test key is also used to remove the front cover of the unit should a frangible element need to be replaced.

### Options

Both break glass (frangible elements) and re-settable operating elements may be used. The MCP can be configured as either a break glass or re-settable unit by simply changing from one element to another. Other than the optional frangible element, no additional parts are required. Other parts and accessories include colour matched surface mount boxes, recess mount adapters, trim skirts, flip covers, metal test keys and replacement parts.

This range of manual call points is available in various colours with various trigger resistor options to suit most applications. In addition various function markings are available including regional language variants.




### Szczegóły

- Zaprojektowane specjalnie do zabezpieczania drzwi i ewakuacji
- Sygnalizacja alarmu za pomocą flagi alarmowej
- Zwiększona estetyka dzięki nadrukowanemu metodą sitodruku oznaczeniom funkcjonalnym o wysokiej rozdzielczości
- Możliwość resetowania i użycia z opcjonalnym elementem łamliwym
- Łatwy w instalacji
- Dostępne są różne opcje montażu powierzchniowego i wnękowego zapewniające elastyczność instalacji
- Dostępna jest pokrywa ochronna na zawiasach z zabezpieczeniem przed manipulacją, aby uniknąć przypadkowego uruchomienia
- Adapter kompatybilny wstecz, dostępny do zastosowań modernizacyjnych w istniejących systemach
- Wejście na klucz testowy z przodu urządzenia, zapewniające łatwy dostęp, nawet gdy zamontowana jest pokrywa ochronna
- Łatwa obsługa i konserwacja dzięki demontażowi kluczem testowym i złączom wtykowym

# NC-MC-0-G

## Inteligentny konwencjonalny ręczny przycisk ostrzegawczy do montażu wnękowego - 0 Ω (zielony)

## Specyfikacja techniczna

### General

| | |
|---|---|
| Status indication | Alarm flag |
| Compatibility | Conventional alarm systems |
| Connectivity | Hardwired contacts |

### Electrical

| | |
|---|---|
| Power supply type | VDC |
| Operating voltage | 20 to 24 VDC |
| Current consumption | 0 mA (Standby)<br>55 mA - limited by the CIE - (Alarm) |
| Cable specification | 0.404 to 2.05 mm (0.13 to 3.31 mm²) |
| No. of cable cores | 2 |
| Terminals | 7 |

### Detection

| | |
|---|---|
| Detection principle | Manual activation |
| Monitoring | Activated, Off |
| Coverage area | Region specific |
| Zone length | <2 km, CIE specific |
| Response time | < 3 s |
| Installation height | Determined by local regulation |

### Output

| | |
|---|---|
| Output quantity | 2 |
| Output type and rating | 1 x NO resistor limited, 1 x change over relay 1 A @ 24 VDC |

### Physical

| | |
|---|---|
| Physical dimensions | 87 x 87 x 26 mm (W x H x D) |
| Net weight | 101 g |
| Colour | Grün (RAL 6024) |
| Mounting type | Back box, Versenkte Montage, Wandmontage |
| Material (body) | Schwer entflammbares ABS |
| Functional marking | Running man |

### Environmental


| | |
|---|---|
| Vandal proof | No |
| Operating temperature | -10 to +55°C |
| Storage temperature | -25 to +70°C |
| Relative humidity | 10 to 95% noncondensing |
| Environment | Drinnen |
| IP rating | IP41 |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS 3, WEEE |
| Voluntary marks | BOSEC |

### Wyroby zgodne

| Kategoria | Odniesienie | Opis |
|---|---|---|
| Detection device | N-MC-AFM-G | Akcesorium MCP - adapter do montażu podtynkowego - zielony |
| Detection device | N-MC-BB-G | Akcesorium MCP, puszka ręcznego ostrzegacza pożarowego, zielona |
| Detection device | N-MC-FC | Akcesorium ROP, przezroczysta klapka inteligentnego ręcznego ostrzegacza pożarowego |
| Detection device | N-MC-FE | Akcesorium ROP, wymienna szybka do inteligentnego ręcznego ostrzegacza pożarowego |
| Detection device | N-MC-S-G | Akcesorium MCP - kołnierz mocujący - zielony |

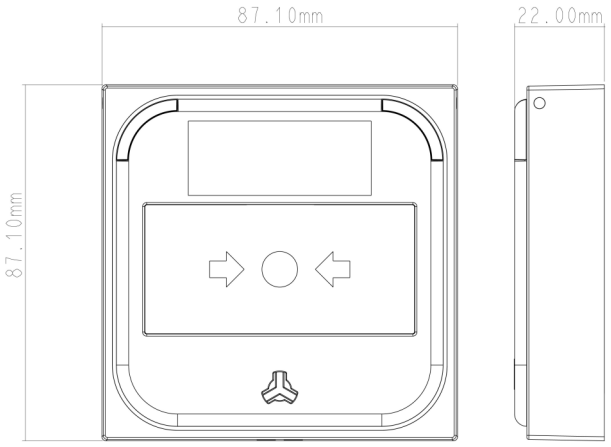


KIDDE COMMERCIAL

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57