
# AD111

## Internal addressable device interface

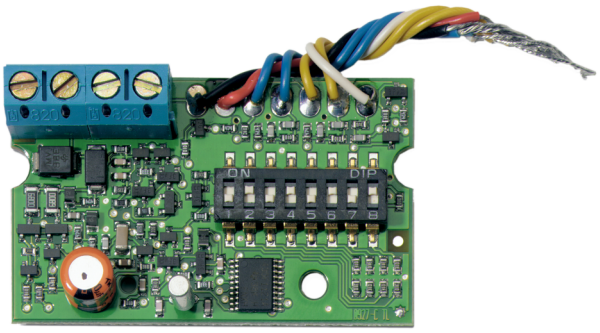


## Details

- 2/4 wire internal interface
- Two inputs to monitor alarm and tamper relay
- One output to trigger the LED
- If needed powered through auxiliary power supply
- Fit to EV125/425 & 500 series

# AD111

## Internal addressable device interface

## Technical specifications

### General

| | |
|---|---|
| Accessory group | Bevægelsessensorer |
| Type | Modul |

### Electrical

| | |
|---|---|
| Operating voltage | 12 / 24 VDC |
| Current consumption | 330 µA +/-10% from bus |

### Physical

| | |
|---|---|
| Physical dimensions | 30 x 50 x 12 mm (W x H x D) |

### Environmental

| | |
|---|---|
| Environment | Indendør |

### Bus protocol

| | |
|---|---|
| | Interlogix property |

### External power supply

| | |
|---|---|
| | 9 to 13.8 VDC |

### Unit load for DGP


| | |
|---|---|
| | 1 |

### Address range

| | |
|---|---|
| | 0 to 255 |

### Open collector current output

| | |
|---|---|
| | 100 microA max. |

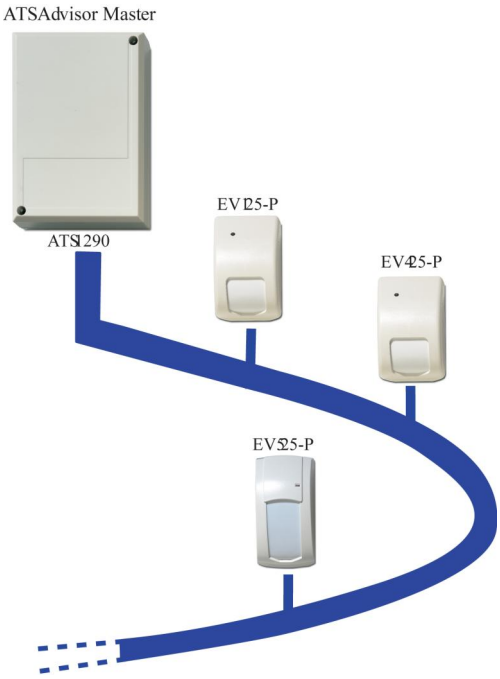


As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:24