SMA-L-MULTI

Czytnik biometryczny MA SIGMA Lite - Multi, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, 500 użytk.IP65



SMA-L-MULTI

Czytnik biometryczny MA SIGMA Lite - Multi, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, 500 użytk.IP65

Specyfikacja techniczna

System

RTE (Request To Exit)	No
CSN (Card Serial Number)	Yes
Custom data model	Yes

Technology

Reader type	Biometrico
Reader operating-transmitting frequency	13.56 MHz
Supported technology 13.56 MHz	MIFARE Classic (CSN), MIFARE Classic (custom data), MIFARE DESFire (CSN), MIFARE DESFire EV1 (CSN), MIFARE DESFire EV1 (custom data), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE Plus (CSN, level 1 and 3), NFC (CSN)
SAM module embedded	No

Biometric

Biometric type	Fingerprint
Biometric sensor type	Ottica

Interface & connections

Interface	Ethernet, OSDP V2, OSDP V2 Secure Channel, RS-485, USB, Wiegand
Connector type	Network, Pigtail

Tamper type

Pry-off tamper	No
Opening tamper	Yes

Operation

Stand-alone	Yes
PIN keypad	No

Electrical

Power supply type	VDC

Physical


Colour	Black
Material	Polycarbonate
Form factor	Oversized
Mounting type	Montaggio a superficie

Environmental

Vandal proof	No

Regulatory

Compliancy	CE, FCC, REACH, RoHS

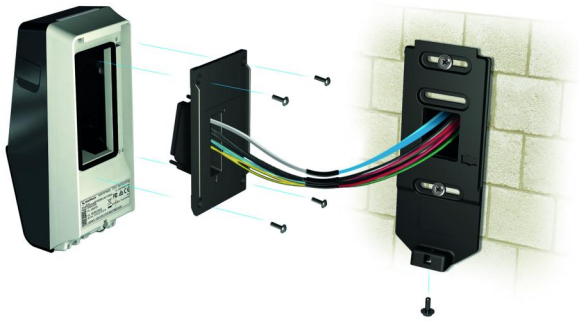

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57