
WC112W

100 m, 12 aders, 2x0,75 + 10x0,22 mm, wit.

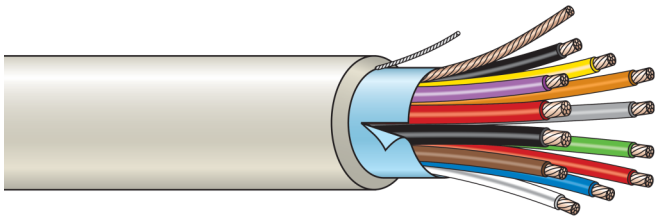

WC112W

100 m, 12 aders, 2x0,75 + 10x0,22 mm, wit.

Technische specificaties

Shielding

Shielded	Yes

Core

Conductor size	0.22 mm² (data) - 0.75 mm² (power)
Conductor material	Plain copper
Wire colours	Red, Black (power) Blue, White, Yellow, Green, Grey, Brown, Red, Orange, Black, Violet (data)

Jacket

Jacket colour	Hvid
Jacket thickness	Min. 0.45 mm2 - max 0.7 mm2

Electrical Characteristics

Current rating	1 A
Max.conductor DC resistance	92.4 ohm/km at +20°C
Nominal (mutual) capacitance	90 pF/m

Physical

Cable length	100 m
No. of wires	12

Environmental

Halogen free	Yes

Regulatory

Compliancy	CE

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57