1X-F2-SC-28

Conventional Fire Panel with Scandinavian Key - 2 Zone



1X-F2-SC-28

Conventional Fire Panel with Scandinavian Key - 2 Zone

Technische Spezifikationen

General

Maximum system capacity (device count)	fino a 1280
Network size (nodes)	bis zu 32

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	bis zu 2

Input

Input quantity	2

Physical


Form factor	Klein
Colour	Grigio (RAL 7035)
Mounting type	Montaggio a superficie

Environmental

Environment	Drinnen

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-4

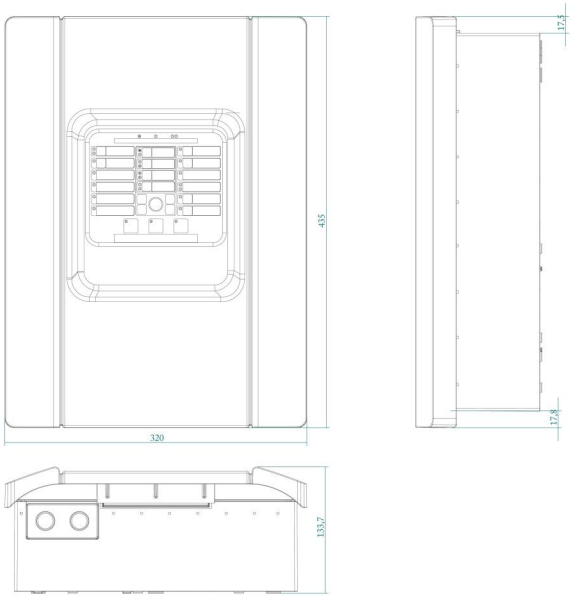

KIDDE COMMERCIAL

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.