
ATS1500AV-IP-MBC

Advisor Advanced 1500 IP VdS Zentralenplatine, VdS Secure IP

Allgemein

VdS Zentralenplatine zum Austausch für Advisor Advanced
ATS1500AV-IP Zentrale

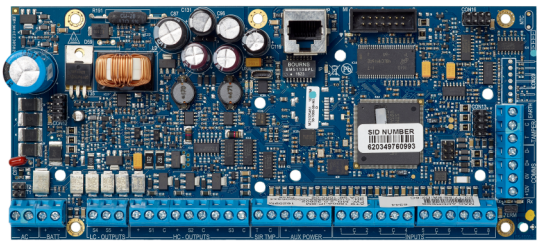

ATS1500AV-IP-MBC

Advisor Advanced 1500 IP VdS Zentralenplatine, VdS Secure IP

Technische Spezifikationen

System

Product line	Advisor Advanced
Product type	Integrierte Zugangskontrolle
Panel type	Hybrid
Kit	No
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	16
Specified cable	WCAT 52/54 oder gleichwertig

Inputs

Max no. of inputs	32
Onboard inputs	8
Inputs plug-in expansion	8

Outputs

No. of outputs	128
No. of onboard outputs	5

Area

No. of areas	4

User/Cards

Max. no. of users	50
Users with name	2000
Max. no. of cards	2000 - 65532
Max. no. of PIN codes	2000 - 65532

Access control

Standard doors on control panel	4
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	28

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

Event log

Alarm event log	14500
Access event log	10000

Electrical

Power supply type	230 VAC
Power supply value	230 VAC +10%, -15%, 50 Hz
Power consumption	150 mA
Max system current	950 mA bei 13.8 V ±0.2 V
Max aux power current	840 mA
Auto-reset fuses	5
Glass break fuses	1 (Netzspannung)

Physical

Physical dimensions	202 x 90 x 40 mm
Housing	Brak mieszkań

Environmental

Operating temperature	-10 bis +55°C
Relative humidity	95% nicht kondensierend

Regulatory

Compliancy	CE
Certification	CE, VdS

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.