
WB1-HF

Cable Belden 9504 Cca grade (500m rolls)

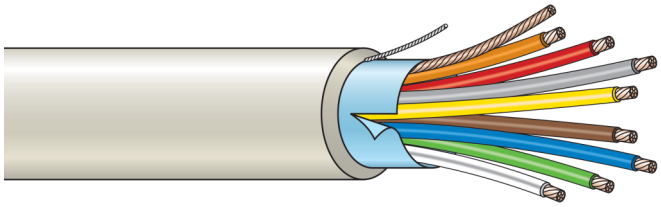

Details

- For internal or external wiring of warning network systems
- Halogen free and CCa graded
- Suitable for gluing to surfaces

WB1-HF

Cable Belden 9504 Cca grade (500m rolls)

Technical specifications

Shielding

Shielded	No
Insulation type	semi-rigid insulation

Core

Conductor size	0.6 mm²
Conductor material	Tinned copper wired, 7 strand
Wire colours	Black, Green, Blue, White, Red

Jacket

Jacket colour	Hvid
Jacket thickness	Min. 0.45 mm - max. 0.7 mm

Electrical Characteristics

Test voltage	2000
Current rating	1A
Max.conductor DC resistance	25 ohm/km at +20°C
Nominal (mutual) capacitance	150 pF/m
Structural return loss	46

Physical

Cable length	500 m
No. of wires	4
Weight	46 kg/km

Environmental

Halogen free	Yes
Operating temperature	-30 to 80C
Environment	Indendør

Regulatory

Compliancy	CE
Standards	CPR Class CCA

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:33