# 1X-F4-22

## Conventional Fire Panel - 4 Zone - Hungarian



# 1X-F4-22

## Conventional Fire Panel - 4 Zone - Hungarian

## Specifiche tecniche

### General

| | |
|---|---|
| Maximum system capacity (device count) | do 1280 |
| Network size (nodes) | do 16 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 4 |

### Zone

| | |
|---|---|
| Maximum zone capacity | do 4 |

### Input

| | |
|---|---|
| Input quantity | 2 |

### Physical


| | |
|---|---|
| Form factor | Lille |
| Colour | Szary (RAL 7035) |
| Mounting type | Montaż nawierzchniowy |

### Environmental

| | |
|---|---|
| Environment | Indendør |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-4 |

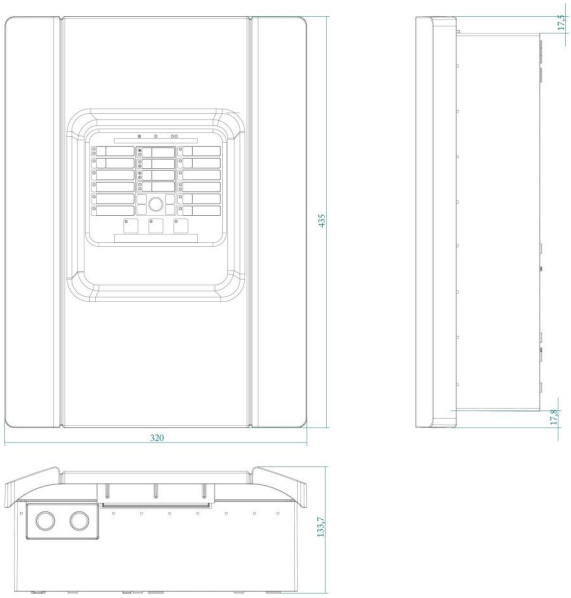


In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57