# 1X-F4-27

## Conventional Fire Panel - 4 Zone - Lithuanian



# 1X-F4-27

## Conventional Fire Panel - 4 Zone - Lithuanian

## Technische Spezifikationen

### General

| | |
|---|---|
| Maximum system capacity (device count) | do 1280 |
| Network size (nodes) | do 16 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 4 |

### Zone

| | |
|---|---|
| Maximum zone capacity | do 4 |

### Input

| | |
|---|---|
| Input quantity | 2 |

### Physical


| | |
|---|---|
| Form factor | Klein |
| Colour | Szary (RAL 7035) |
| Mounting type | Montaż nawierzchniowy |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-4 |

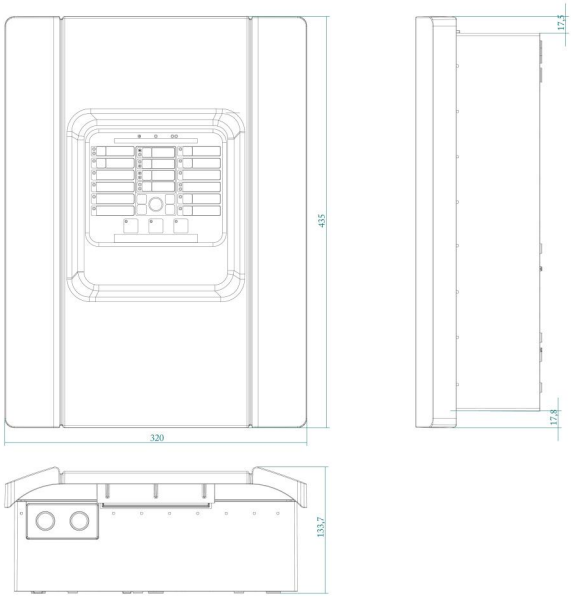


KIDDE COMMERCIAL

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.