2010-2-PIB

Printkort med overvåget input til indbygning i central

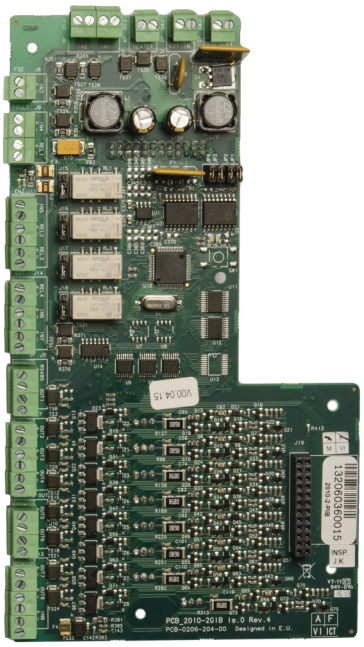

2010-2-PIB

Printkort med overvåget input til indbygning i central

Tekniske specifikationer

General

Maximum system capacity (device count)	1 to 32, more than 160K, up to 120K, up to 128, up to 160K, up to 20K, up to 256, up to 4096, up to 512, up to 60K, up to 64, up to 96
Network size (nodes)	1 to 32, mere end 128, up to 128, up to 64

Electrical

Power supply type	VDC

Zone

Maximum zone capacity	1 to 64, more than 1024, up to 1024, up to 256

Physical

Form factor	Stor
Mounting type	I kabinettet

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CPR

KIDDE COMMERCIAL

Kidde Global Solutions er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på dk.firesecurityproducts.com eller ved at kontakte din salgsrepræsentant hos.

Last updated on 12 November 2026 - 18:57